




Direct / Indirect recessed fluorescent luminaire with centrally mounted perforated deflector.

**Specification**

- Fabricated steel body
- Suitable for 15-25mm exposed T grid ceiling
- Suitable for plasterboard ceiling (see optional extra)
- Powder coated finish

**Application**

- Reception
- Offices
- Call Centre
- Shops
- Conference Room

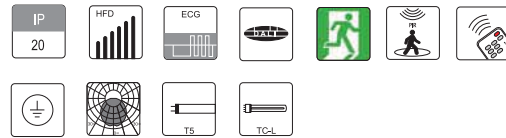

**Product Codes**

|            |             |
|------------|-------------|
| T6IDL155PZ | 1 x 55W PLL |
| T6IDL255PZ | 2 x 55W PLL |
| T6IDL236PZ | 2 x 36W PLL |
| T6IDL240PZ | 2 x 40W PLL |
| T6IDL214FZ | 2 x 14W T5  |
| T6IDL224FZ | 2 x 24W T5  |

Add suffix /EM for 3hr Maintained Emergency

**Optional Extras**

|            |                            |
|------------|----------------------------|
| OEM-ATT-01 | Plasterboard Recessing Kit |
| OEM-ATT-05 | Surface Conversion Box     |

**Dimensions**

