

T6 IDP

Recessed Fluorescent Range / Indirect with Prismatic




Direct / Indirect recessed fluorescent luminaire with centrally mounted opal and prismatic diffuser.

Specification

- Fabricated steel body
- Suitable for 15-25mm exposed T grid ceiling
- Suitable for plasterboard ceiling (see optional extra)
- Powder coated finish
- Opal and prismatic diffuser

Application

- Reception
- Offices
- Call Centre
- Shops
- Conference Room

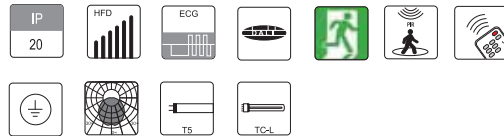

Product Codes

T6IDP1.55PZ	1 x 55W PLL
T6IDP2.55PZ	2 x 55W PLL
T6IDP2.36PZ	2 x 36W PLL
T6IDP2.40PZ	2 x 40W PLL
T6IDP2.14FZ	2 x 14W T5
T6IDP2.24FZ	2 x 24W T5

Add suffix /EM for 3hr Maintained Emergency

Optional Extras

OEM-ATT-01	Plasterboard Mounting Kit
OEM-ATT-02	Surface Mounting Kit

Dimensions

